



Economy Combination Unit Specification


Emergency Exit Combination

120 or 277 Voltage, Damp Location

Features and Benefits:

- Universal mounting canopy for top installation
- Energy consumption of less than 4 watts for red letters and less than 5 watts for green letters
- LED lamp life of 25 years
- Push-to-test
- Automatic, low-voltage disconnect (LVD)
- Universal transformer for 120 or 277 VAC operation
- Two fully adjustable, glare-free lighting heads
- Heads rotate 180°+ for maximum field flexibility
- Injection-molded, V-0 flame retardant, high-impact thermoplastic housing
- Maintenance-free battery provides an estimated service life of 10 years with an operating temperature range of 20°C (68°F) to 40°C (104°F)
- Charge rate/power on LED indicator light
- UL, CUL, and CSA approved
- Meets NEC and NFPA code

Dimensions:

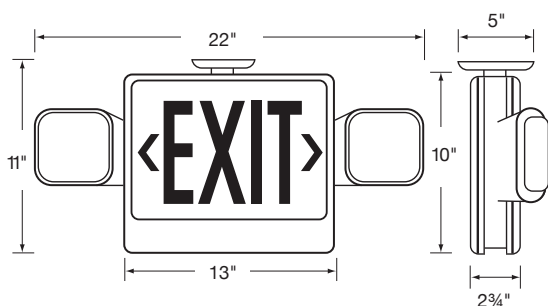


Catalog Number

Notes


Type



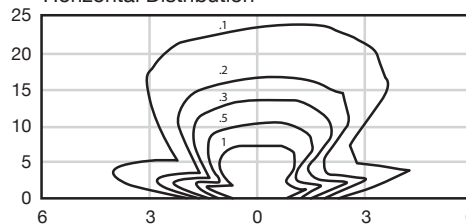

Horizontal Distribution

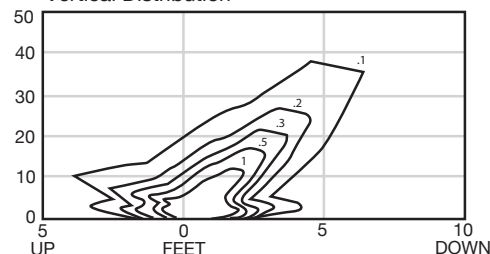

Vertical Distribution



Warranties & Compliances:	Item #	Description	LED Color	Housing Color
Electronics & Housing 5 YEAR WARRANTY Sealed Lead Acid Battery 1 YEAR WARRANTY LED Strip 25 YEAR WARRANTY  	Ordering Information:			
	20723	2 Headed Adjustable Economy Combination Red Universal	Red	White
	20725	2 Headed Adjustable Economy Combination Green Universal	Green	White
	Accessories:			
	207LWG	Large Wire Guard for Combo Units		
	20734	Replacement Battery Lead Acid 6V 4.5Ah		
	29999JR	Red Diffuser Panel		
	29999JG	Green Diffuser Panel		
	939	Replacement Lamp 6V 0.9A TS Wedge		
	20709	Replacement Canopy		

