

ProLED.

T8 Linear 8 Foot Double Ended Bypass Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____



Low Maintenance



50,000 Hours



120-277



RECOGNIZED COMPONENT
Intertek
4005203
CONFORMS TO NSF 570.2
Food Equipment
Certification



Most reliable and efficient way to retrofit existing Linear Fluorescent T8 and T12 luminaires with simple rewiring

Specifications


- Single pin and recessed double contact option
- Uses 49% less energy than a standard Fluorescent T8 and lasts up to 66% longer¹
- PET coating helps contain glass in the event of breakage
- Suitable for use in totally enclosed luminaires
- Double-end powered, operates on 120V-277V line voltage range
- 82 CRI for quality and consistent color rendering
- -20°C (-4°F) to 45°C (113°F) operating temperature range
- UL-1598C classified retrofit kit
- UL approved for damp locations




Single Pin

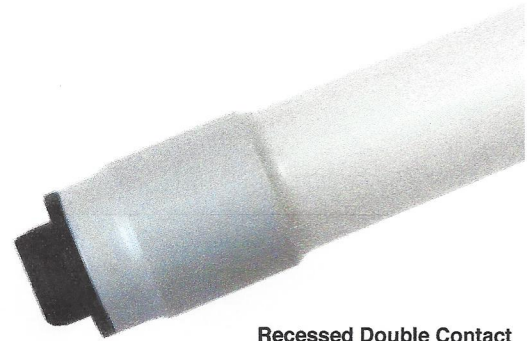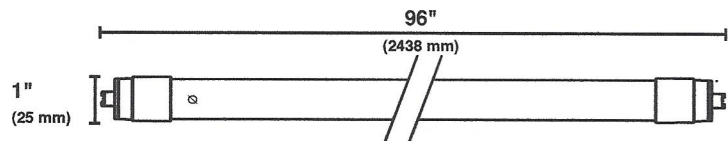

Recessed Double Contact

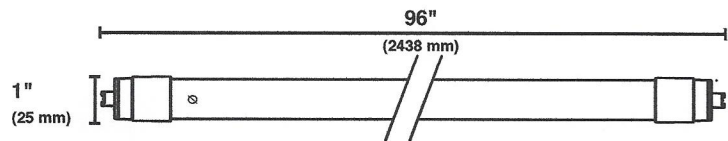

Savings Comparison

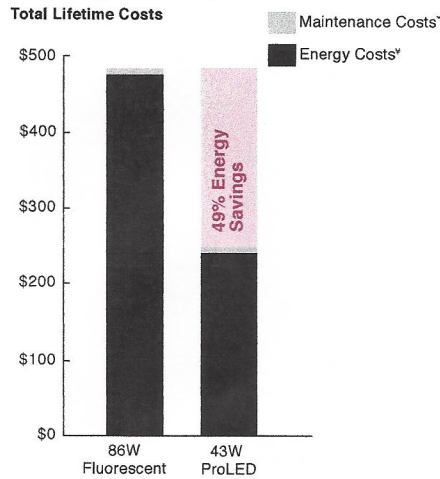

* Maintenance costs based on 15 minutes at \$40 per/hr
* Energy costs based on \$0.11 kWh

Ordering Information



Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	THD	Equivalent Wattage
42	Single Pin	82875	T896FR42/840/BYP2/SP/LED	120-277	4000	82	5500	50,000	270°	1/10	96"	<20%	86
42	Single Pin	82876	T896FR42/850/BYP2/SP/LED	120-277	5000	82	5500	50,000	270°	1/10	96"	<20%	86
42	Recessed Double Contact	82877	T896FR42/840/BYP2/RDC/LED120-277	120-277	4000	82	5500	50,000	270°	1/10	96"	<20%	86
42	Recessed Double Contact	82878	T896FR42/850/BYP2/RDC/LED120-277	120-277	5000	82	5500	50,000	270°	1/10	96"	<20%	86
42	Recessed Double Contact	82879	T896FR42/865/BYP2/RDC/LED120-277	120-277	6500	82	5500	50,000	270°	1/10	96"	<20%	86

o NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty - Commercial / Industrial: This product is warranted for 5 years from the date of purchase.

Must be operated with an ambient fixture temperature between -4°F(-20°C) and 113°F(45°C).

¹ Energy savings based on \$0.11 kWh over 50,000 hour life.

Warning

Halco ProLED Linear T8 will not operate on a linear fluorescent ballast. Please re-wire the luminaire as shown in the installation instructions included with the product.